

Digital Wireless Observation System

WV0S511

FEATURING

**Wi**Sight\* technology




## **PRODUCT FEATURES:**

- Kit includes: 5.6" LCD monitor, super CMOS wireless back-up camera, suction cup monitor mount, 12V DC plug
- · Easy installation, fits most applications
- Two camera inputs (one wireless, one wired)
- Camera connects to rear lights or other 12V DC power source
- Strong signal transmits through and around objects up to 60 feet away



2602 Marina Drive • Elkhart, IN 46514 www.asaelectronics.com

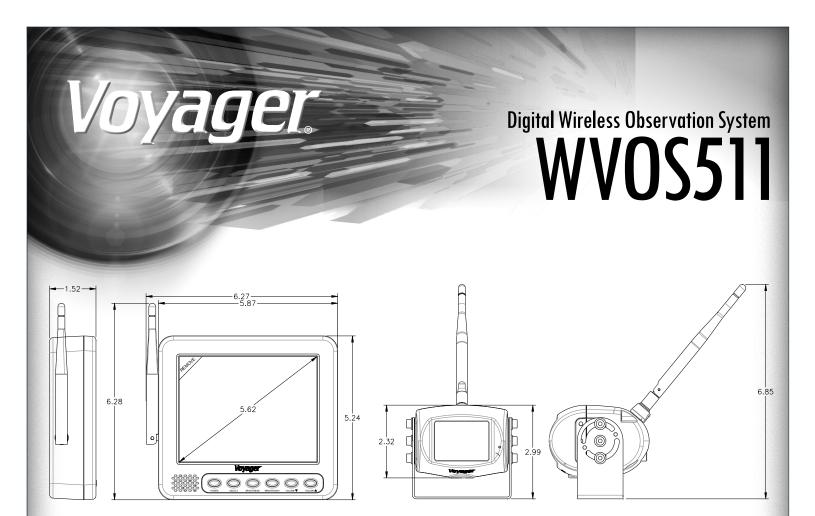

Specifications	<b>CAMERA</b>	<b>MONITOR</b>
Power System	12VDC	12VDC
Operating Voltage Range	10 ~14V	10 ~ 14V
Power Consumption (MAX)	379mA	630mA
Operating Temperature Range	-4°F to 149°F	-4°F to 149°F
Storage Temperature Range	-40°F to 185°F	-40°F to 185°F
Operating Relative Humidity	100%	95%
Waterproof Rating	IPX6	NA
Overall Dimensions	5.8"x 3"x 3.3"	1.5"x 5.2" x 6.3"
Product Weight (unpackaged)	14 oz	14 oz
Video Output Signal Format	NTSC	NTSC
Video Signal Level	1.0V p-p ; 75Ω	1.0V p-p ; 75Ω
Audio	Microphone	1.5 watt
Sensor	1/4" CMOS	NA
Sensitivity	0 Lux	NA
Image Orientation	Mirror (Reversed)	NA
Resolution	380 Lines	960(W) x 234(H)
View Angles	135°(D) 102°(H) 72°(V)	100°(H) 80°(V)
Brightness	NA	500 nit
Contrast Ratio	NA	250:1
Response Time	NA	30ms(R) 40ms(F)
Display Format	NA	4:3